


Cast Steel Horizontal Lift Check Valve

V V[®]

NP16 • Bolted Cover • Flanged Ends • DIN Std. 2401

Figure No. 1020 – P

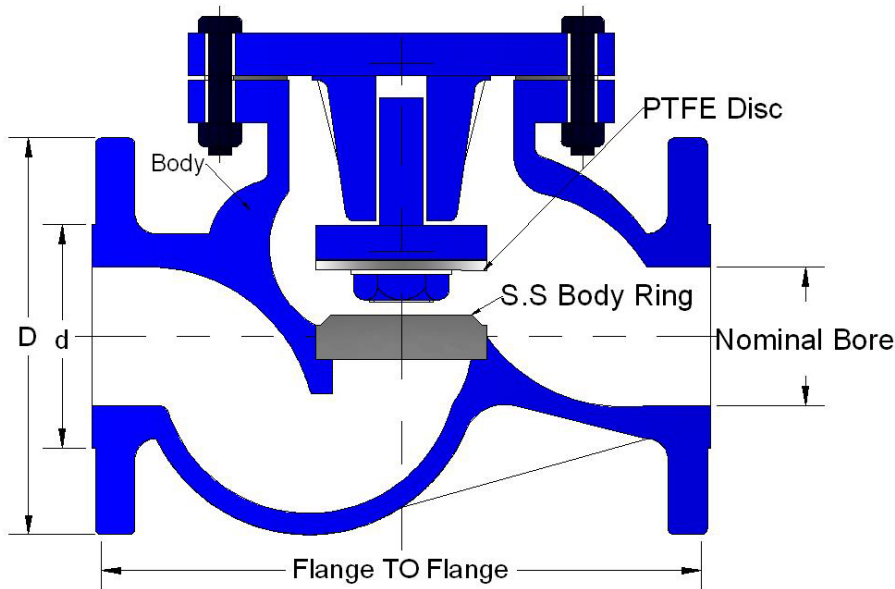

Body Test Pressure : 60 Kg/cm².

- **For air service/ Hot air / gases/ steam**

Features


- Globe type body design with full flow area
- Design prohibits galling or scoring of seating because the disc meets the flat seat securely on closing with no rubbing action
- Bolted Bonnet
- Flanges as per DIN 2545.
- Size Range : 15 mm – 150 mm
- Packing Graphited Asbestos
- Gaskets Compressed Asbestos Fibre

Dimensions

Nominal Size	Flange TO Flange L	(Dia.) D Ø	Raised face dia. d Ø	H (Appx.)	T (Thickness)
mm	mm	mm	mm	mm	mm
15	130	95	45	85	14
20	150	105	58	85	16
25	160	115	68	90	16
32	180	140	78	100	18
40	200	150	88	120	18
50	230	165	102	130	20
65	290	185	122	160	20
80	310	200	138	170	22
100	350	220	158	190	24
125	400	250	188	215	26
150	480	285	212	240	26

1. 1/16 inch Raised Face is regularly furnished on CL 150 unless otherwise specified.
2. The height of raised face is included in minimum flange thickness for CL 150.

Bolted Cover • Flanged Ends • DIN Std. 2401 • PN 16

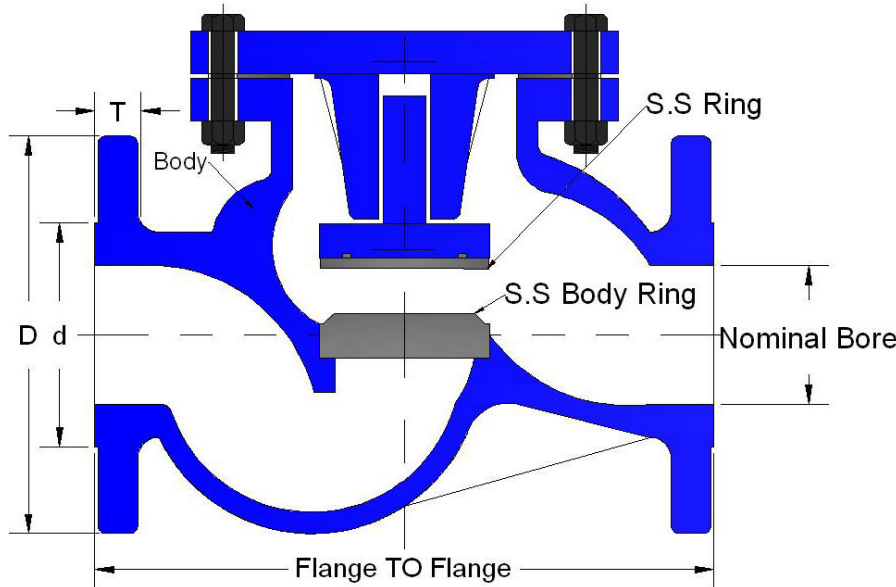

Features

- Globe type body design with full flow area
- Design prohibits galling or scoring of seating because the disc meets the flat seat securely on closing with no rubbing action
- Flanges as per DIN 2533 PN 16
- Bolted Bonnet
- Size Range : 15 mm – 150 mm
- Packing Graphited Asbestos
- Gaskets Compressed Asbestos Fibre

Dimensions

Nominal Size	Flange TO Flange L	Dia. D Ø	Raised face dia. d Ø	H (Appx.)	T (Thickness)
mm	mm	mm	mm	mm	mm
15	130	95	45	85	14
20	150	105	58	85	16
25	160	115	68	90	16
32	180	140	78	100	18
40	200	150	88	120	18
50	230	165	102	130	20
65	290	185	122	160	20
80	310	200	138	170	22
100	350	220	158	190	24
125	400	250	188	215	26
150	480	285	212	240	26

1. 1/16 inch Raised Face is regularly furnished on CL 150 unless otherwise specified.
2. The height of raised face is included in minimum flange thickness for CL 150.

Address:

V.V. Valves Industrial Corporation.

25, Industrial Development
Colony, Jalandhar Road,
Hoshiarpur.(Pb.)-146001.

Phone : 252-207

Fax: 500-289

E-Mail : info@vvvalves.in

Web : www.vvvalves.in

NOTES

Handwritten notes area with horizontal lines and a large, faint watermark reading "V.V. Valves".